

Optical Fiber Cable Distribution Box - FDB044 Technical Specification

Overview


DRAKO Model No. FDB044 can connect the drop cable with feeder cable as the termination point in the Fttx network, which is cable to meet at least 16 users requirements. It can help splicing, splitting, storage and management with suitable space.

Technical Index



Model No.	FDB044
Capacity	16 cores
Material	PC+ABS, ABS
Dimension(L*W*D,MM)	343*281*90
Color	Black.
Protection Level	IP65
Flame retardant performance	Non-flame retardant
Splitter	Can be with 2x1:8 Tube Splitter
Ports	3 inlet/16outlet
Weight	1.5kg

The dimension diagram:(mm)

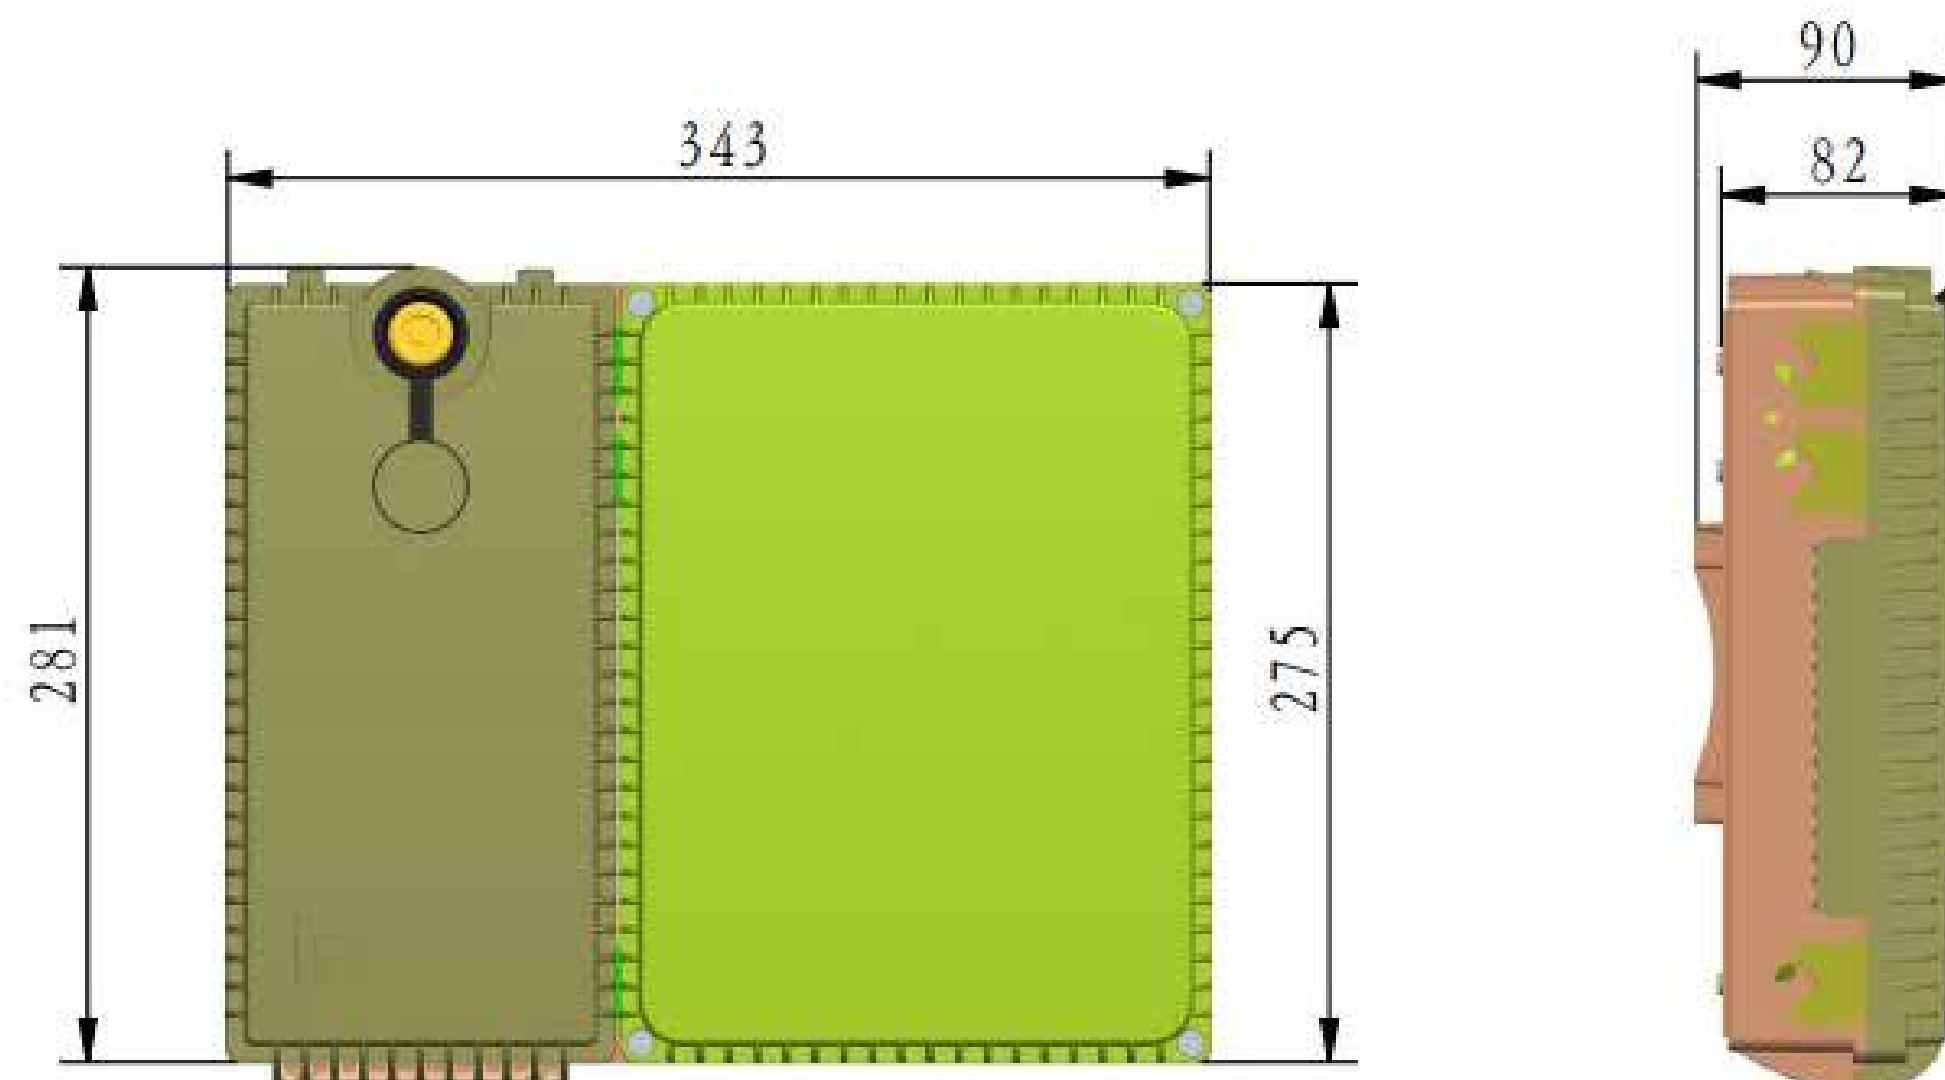

Features



* FDB044 can connect the drop cable with feeder cable as the termination point in the Ftx network, which is cable to meet at least 16 users requirements. It can help splicing, splitting, storage and management with suitable space

* High quality PC+ABS material optional, can ensure harsh conditions such as vibration, impact, tensile cable distortion and strong temperature changes. 3.2Solid structure, perfect outline, thunder, erosion and adding resistance.

* Strong and reasonable structure with mechanical sealing structure, can be opened after sealing and cab be reused.

* Well water and dust proof, unique grounding device to ensure the sealing performance, convenient for installation.

* The splice closure has a wide application range, with good sealing performance, easy installation, produced with high strength engineering plastic housing, with anti-aging, corrosion resistance, high temperature and high mechanical strength and so on.s).

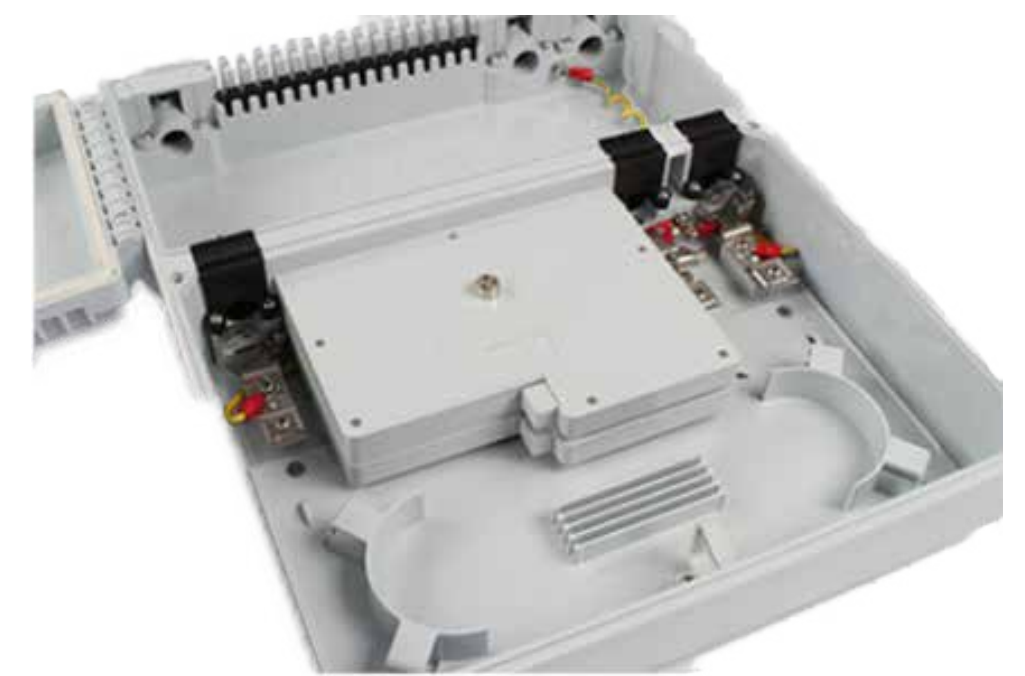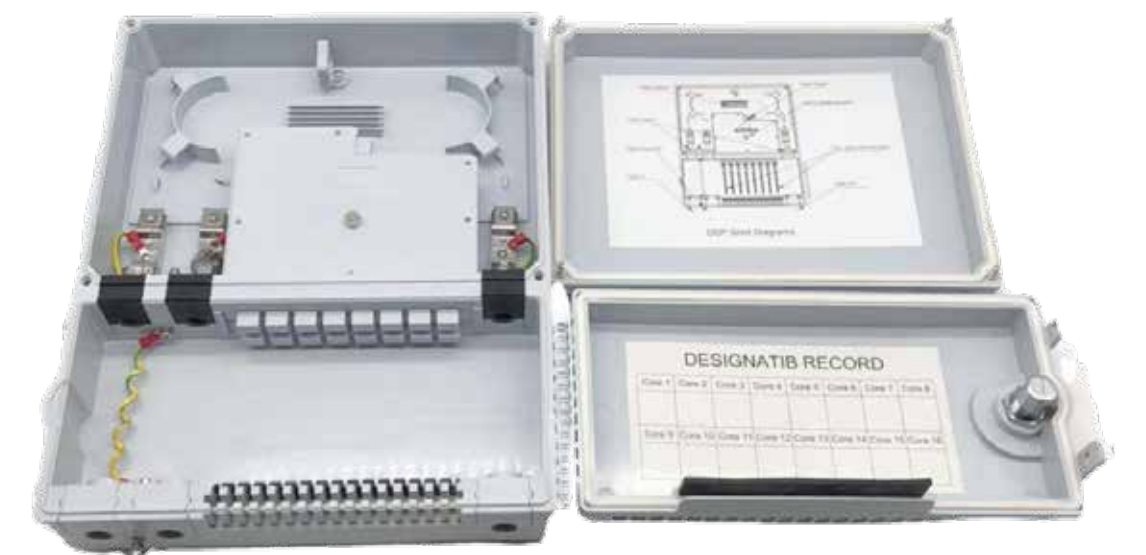

Package Information

- 1 - Individual Package
- 2 - Plastic bag size: 600*210mm
- 3 - Inner box with single corrugated size: 350*300*100mm
- 4 - Carton with double corrugated size: 605*375*470mm(8PCS/Box)
- 5 - Weight per carton : 18.5 KG